

# SOLID STREAM NOZZLE FOR MONITOR



## TECHNICAL DATA

NOZZLE FLOW RANGE	NW500	-	500 GPM
	NW700	-	700 GPM
	NW1000	-	1000 GPM

WATER INLET CONNECTION	3" BSP (F) FOR NW 500
	3" BSP (F) FOR NW 700
	4" BSP (F) FOR NW 1000

MATERIAL OF CONSTRUCTION	Bronze
-----------------------------	--------

MAXIMUM SERVICE PRESSURE	12 Bar (175 PSI)
-----------------------------	------------------

APPROVAL	FM Approved
----------	-------------

## DESCRIPTION

NW series nozzles are fixed gallonage smooth bore straight stream nozzles, designed for heavy-duty use on fixed monitors. The nozzle is factory calibrated for flow as specified in the technical data.

The nozzle is made out of Bronze material.

The performance data shown in this catalogue is effective stream trajectory in stand still air condition. The maximum overall reach of last water drop is approximately 3-5% more than the effective stream performance data given. The jet stream may get effected considerably with tail or head wind.


## CAUTION

A trained personnel for fire fighting, with appropriate guidance & training must use the product to reduce the risk or injury. The nozzle must be fixed to the monitor carefully. The mismatched or damaged threads may cause leakage or uncouple the nozzle during operation.

Application of water or foam on an electric appliance can cause serious injury by electrocution, as water is a conductor of electricity.

The water supply to the nozzle must be gradual. Sudden surge of water supply must be avoided. The monitor mounting must be supported properly to support the nozzle reaction force.




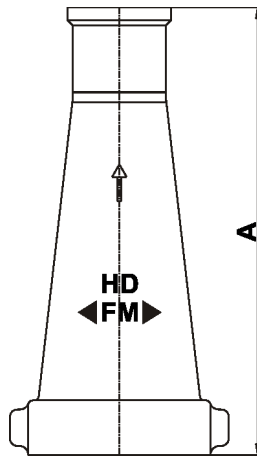

DIMENSION in millimeters (Approximate)

	NW 500	NW700	NW1000
A	240	246	270

STREAM TRAJECTORY  
CROSS REF. IN % - JET REACH & HEIGHT

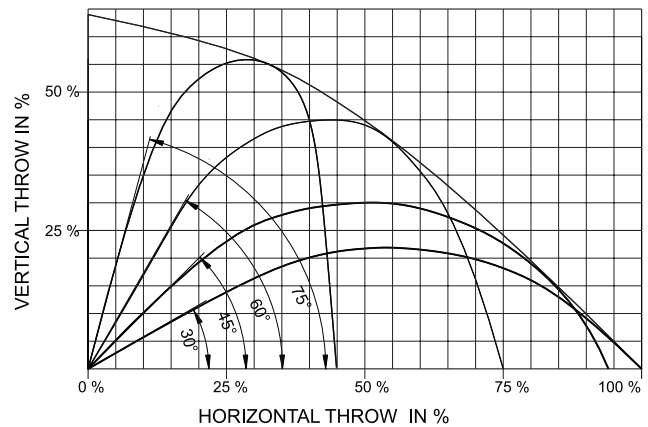

## PERFORMANCE DATA

ACTUAL FLOW RATE LPM (GPM)	PRESSURE KG/CM.SQ. (PSI)	STRAIGHT STREAM RANGE METERS (FEET)
1900 (500)	7.0 (100)	54 (177)
2650 (700)	7.0 (100)	60 (197)
3785 (1000)	7.0 (100)	64 (210)

PERFORMANCE DATA FOR WATER STREAM RANGE ARE BASED AT 32 DEG. NOZZLE ELEVATION IN STILL AIR CONDITION AND WITH HD MONITOR INLET PRESSURE.

### LIMITED WARRANTY

HD FIRE PROTECT PVT. LTD. hereby referred to as HD FIRE warrants to the original purchaser of the fire protection products manufactured by HD FIRE and to any other person to whom such equipment is transferred, that such products will be free from defect in material and workmanship under normal use and care, for two (2) years from the date of shipment by HD FIRE. Products or Components supplied or used by HD FIRE, but manufactured by others, are warranted only to the extent of the manufacturer's warranty. No warranty is given for product or components which have been subject to misuse, improper installation, corrosion, unauthorized repair, alteration or un-maintained. HD FIRE shall not be responsible for system design errors or improper installation or inaccurate or incomplete information supplied by buyer or buyer's representatives. HD FIRE will repair or replace defective material free of charge, which is returned to our factory, transportation charge prepaid, provided after our inspection the material is found to have been defective at the time of initial shipment from our works. HD FIRE shall not be liable for any incidental or consequential loss, damage or expense arising directly or indirectly from the use of the product including damages for injury to person, damages to property and penalties resulting from any products and components manufactured by HD FIRE. HD FIRE shall not be liable for any damages or labour charges or expense in making repair or adjustment to the product. HD FIRE shall not be liable for any damages or charges sustained in the adaptation or use of its engineering data & services. In no event shall HD Fire's product liability exceed an amount equal to the sale price. The foregoing warranty is exclusive and in lieu of all other warranties and representation whether expressed, implied, oral or written, including but not limited to, any implied warranties or merchantability or fitness for a particular purpose. All such other warranties and representations are hereby cancelled.

### NOTICE :

The equipment presented in this bulletin is to be installed in accordance with the latest publication standards of NFPA or other similar organisations and also with the provision of government codes or ordinances wherever applicable.

The information provided by us is to the best of our knowledge and belief, and consist of general guidelines only. Site handling and installation control is not in our scope. Hence we give no guarantee for result and take no liability for damages, loss or penalties whatsoever, resulting from our suggestion, information, recommendation or damages due to our product.

Product development is a continuous programme of HD FIRE PROTECT PVT. LTD. and hence the right to modify any specification without prior notice is reserved with the company.



**HD FIRE PROTECT PVT. LTD.**  
Protecting What Matters Most to You

D-6/2, ROAD NO. 34, WAGLE INDUSTRIAL ESTATE, THANE 400 604, INDIA.  
 • TEL: + (91) 22 2158 2600 • FAX: +(91) 22 2158 2602  
 • EMAIL: info@hdfire.com • WEB: www.hdfire.com